


**STANDARD CONSTRUCTION NOTES:**

- CONTRACTOR TO VERIFY ALL EXISTING UTILITY TIE-IN CONNECTIONS AND VERIFY LOCATION AND ELEVATION PRIOR TO CONSTRUCTION.
- CONTRACTOR TO BUILD SEWER FROM TIE-IN POINT (A.K.A. DOWNHILL) AND PROCEED UPHILL.
- CITY OF AMARILLO TO BE NOTIFIED 48 HOURS BEFORE ANY CONSTRUCTION BEGINS.
- PIPE DEFLECTION PER MANUFACTURER'S RECOMMENDATIONS.
- ALL UTILITIES TO BE INSTALLED PER TEXAS ADMINISTRATIVE CODE (TAC) STANDARD SEPARATION SPECIFICATIONS.
- A TWO (2) FOOT MINIMUM VERTICAL SEPARATION SHALL BE PROVIDED BETWEEN ANY SEWER MAIN/LINE CROSSING A WATER MAIN/LINE.
- EXCEPTIONS OR DEVIATIONS FROM THE ABOVE MINIMUM CLEARANCES MUST BE APPROVED AND SHOWN ON THE APPROVED WATER AND SEWER PLANS. WHEN UTILITY CONFLICTS ARE FOUND DURING CONSTRUCTION, ALL CHANGES AND REVISIONS MUST BE PRECEDED BY AN APPROVED PLAN REVISION.
- ANY AND ALL MORE STRINGENT REQUIREMENTS REQUIRED BY FEDERAL, STATE, COUNTY OR LOCAL CODES OR ORDINANCES TAKE PRECEDENCE.
- ALL CONSTRUCTION IN CITY OF AMARILLO RIGHT OF WAY TO CONFORM TO THE CITY OF AMARILLO STANDARDS
- ALL CONSTRUCTION ON SITE SHALL CONFORM TO MAVERICK ENGINEERING NOTES AND DETAIL SHEETS.
- CONCRETE OR ASPHALT DAMAGED DURING THE COURSE OF CONSTRUCTION SHALL BE REMOVED AND REPLACED IN KIND PRIOR TO FINAL INSPECTION.
- SANITARY SEWER SHALL BE PVC-SDR-35 UNLESS OTHERWISE NOTED.
- WATER SHALL BE C-900 PVC PIPE UNLESS OTHERWISE NOTED.
- THE CONTRACTOR SHALL PROVIDED ALL THRUST BLOCKING AT ALL FITTINGS AND BENDS AS REQUIRED IN ACCORDANCE TO DETAILS IN THE CITY OF MIDLAND'S DESIGN & CONSTRUCTION STANDARDS. THE CONTRACTOR WILL BE RESPONSIBLE FOR KEEPING EXISTING WATER MAINS IN SERVICE DURING CONSTRUCTION.
- THE CONTRACTOR IS RESPONSIBLE FOR IMPLEMENTING ANY FORMS OF TRAFFIC CONTROL THAT ARE NECESSARY TO COMPLETING THE PROJECT.
- CONTRACTOR SHALL NO BEGIN ANY WORK UNTIL A PRE-CONSTRUCTION MEETING IS HELD WITH THE CITY OF AMARILLO ENGINEERING DEPARTMENT AND AN OFFICIAL NOTICE TO PROCEED LETTER HAS BEEN ISSUED BY THE CITY.
- TRENCH SAFETY RULES AND REGULATIONS, AS ADOPTED BY THE STATE OF TEXAS AND IN ACCORDANCE WITH O.S.H.A. STANDARDS FOR TRENCH EXCAVATIONS, SHALL BE STRICTLY ADHERED TO FOR ANY EXCAVATION EXCEEDING FIVE (5) FEET IN DEPTH. THE CONTRACTOR SHALL MAINTAIN ON-SITE A COPY OF THE TRENCH SAFETY PLAN THAT IS TO BE INCORPORATED IN THE PROJECT AND DELIVER A COPY TO THE CITY OF AMARILLO ENGINEERING DEPARTMENT FOR RECORD PURPOSES ONLY.
- ALL CONSTRUCTION WORK SHALL CONFORM TO THE LATEST EDITION OF THE CITY OF AMARILLO SPECIFICATIONS (LATEST REVISION)
- THE CONTRACTOR SHALL IMPLEMENT SEDIMENT AND EROSION CONTROL MEASURES IN COMPLIANCE WITH THE CITY'S STORM WATER MANAGEMENT ORDINANCE AND ALL APPLICABLE STATE AND FEDERAL REQUIREMENTS PRIOR TO THE STATE OF CONSTRUCTION. CONTRACTOR IS RESPONSIBLE FOR FILING THE NOI/NOT. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING THE CONSTRUCTION SITE TO AID IN EROSION AND SEDIMENT CONTROL.
- THE EXISTING STRUCTURES AND UTILITIES SHOWN ARE APPROXIMATE AND ARE BASED ON SURVEY DATA, FIELD INVESTIGATIONS AND PREVIOUS CONSTRUCTION PLANS. ACTUAL FIELD CONDITIONS MAY VARY FROM THE DATA SHOWN ON THE PLANS AND SHOULD BE VERIFIED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.
- BEFORE BEGINNING WORK, THE CONTRACTOR WILL COORDINATE WITH THE PROPERTY OWNERS AND THE CITY TO ACCESS THE PROPERTY AS NEEDED TO CONSTRUCT THE PROJECT.
- UPON COMPLETION OF THE PROJECT, FINISHED GRADES WILL BE RESTORED TO PRE-CONSTRUCTION CONDITIONS UNLESS OTHERWISE INSTRUCTED BY THE OWNER OR NOTED ON THE PLANS.
- GROUND SURFACES, ETC. SHALL BE LEFT IN A CONDITION EQUAL TO OR BETTER THAN FOUND. COORDINATION SHALL BE WITH THE PROPERTY OWNER, ALL FENCES SHALL BE REINSTALLED IN ORIGINAL LOCATION AND OF SAME TYPE UNLESS OTHERWISE DIRECTED ON THE PLANS.
- CONTRACTOR SHALL NOT DISTURB AREAS OUTSIDE THE LIMITS OF CONSTRUCTION UNLESS AUTHORIZED BY OWNER.
- THE CONTRACTOR IS RESPONSIBLE FOR KEEPING STREETS AND SIDEWALKS ADJACENT TO THE PROJECT AREA FREE OF MUD AND DEBRIS FROM CONSTRUCTION AT ALL TIMES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ADEQUATE SUPPORT/PROTECTION FOR THE EXISTING UTILITIES AS REQUIRED BY THE VARIOUS UTILITY COMPANIES PER COA STANDARD SPECIFICATION 5.01.
- THE CONTRACTOR SHALL COORDINATE UTILITY RELOCATION AND/OR SUPPORT/PROTECTION WITH THE FOLLOWING UTILITY REPRESENTATIVES:

AT&T: TERRY STRINGER - (686) 378-0630  
 ATMOS ENERGY: MIKE FORT - (806) 379-5817  
 COA WATER DISTRIBUTION - (806) 378-3825  
 COA WASTEWATER COLLECTION - (806) 378-3827  
 SUDDENLINK: JOSEPH WEBSTER - (806) 331-4694  
 XCEL: KEITH LARUE - (806) 640-6421

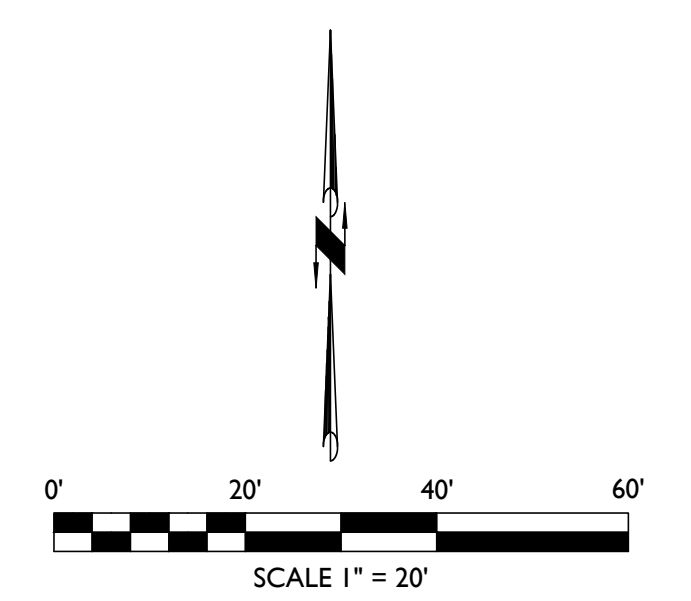

**LEGEND**

- DENOTES SET 1/2-INCH IRON ROD
- DENOTES FOUND MONUMENT AS NOTED
- DENOTES EXISTING WATER METER
- DENOTES EXISTING WATER VALVE
- DENOTES EXISTING MANHOLE
- DENOTES EXISTING GAS MARKER
- DENOTES BOUNDARY LINE
- DENOTES EASEMENT LINE
- DENOTES EXISTING 10\"/>
- DENOTES EXISTING 8\"/>
- DENOTES PROPOSED 6\"/>
- DENOTES PROPOSED SEWER CLEANOUT
- DENOTES PROPOSED SEWER MANHOLE

**SEWER NOTES:**

- A. SEE M.E.P. PLANS FOR CONTINUATION.
- B. TIE INTO EXISTING MANHOLE. PER CITY OF AMARILLO STANDARDS
- C. CONSTRUCT 6\"/>
- D. INSTALL CLEANOUT PER DETAIL 01, INCLUDED ON SHEET C304
- E. INSTALL DOUBLE CLEANOUT PER DETAIL 02 INCLUDED ON SHEET C304.
- F. INSTALL GREASE TRAP PER MEP PLANS. ADJUST GREASE TRAP RIMS TO GRADE. GREASE TRAP MUST HAVE A TRAFFIC LID AND TRAFFIC RATED RISER COVERS/LIDS.



Know what's below.  
Call before you dig.

**MAVERICK ENGINEERING**  
 1909 West Wall Street, Suite "K"  
 Midland, Texas 79701  
 Tel: (432) 262-0999 Fax: (432) 262-0989  
 www.Maverick-Eng.com

NO.	DATE	BY	APPR.	REVISIONS

DRAWN BY: TDE	CHECKED BY: ALM	APPROVED BY: ALM	DATE: 04/14/2016	JOB: 2015-0071
---------------	-----------------	------------------	------------------	----------------

**SEWER PLANS  
CINERGY CINEMAS**  
 BEING A 9.7 TRACT OUT OF LOT 2, BLOCK 2, SECTION 63, BS&F SURVEY, CITY OF AMARILLO, POTTER COUNTY, TEXAS.

