



**ARCHITECT**  
5G Studio Collaborative, LLC.  
800 Jackson St., Suite 500  
Dallas, TX 75202  
Ian Mearns 214-646-1508

**STRUCTURAL ENGINEER**  
Hunt & Joiner, Inc.  
1120 Capitol of Texas Highway Suite 100  
Austin, TX 78746  
Cole Edwards 512-358-8788

**MEP ENGINEER**  
Envirodesign  
900 Ranch Road 620 South, Suite C101-301  
Austin, TX 78734  
Sam Patton 512-693-9015

**CIVIL ENGINEER**  
Maverick Engineering  
1909 West Wall Street, Suite K  
Midland, TX 79701  
Andrew Melton 432-282-0999

**OWNER**  
Cinergy Cinemas & Entertainment  
5720 LBJ Freeway, Suite 625  
Dallas, TX 75240  
Jeffrey Benson 469-804-7475





- A3-01 START FULL CEILING TILE AT FACE OF WALL.
  - A3-02 REFER TO MEZZANINE CEILING PLAN FOR ADDITIONAL INFORMATION.
  - A3-03 OPEN TO STRUCTURE. PAINT ALL EXPOSED STRUCTURE AND MEP ITEMS PS.
  - A3-04 PRIVACY CURTAIN TRACK PER [ 9 / A31.00 ]
  - A3-05 BLACK LIGHT CANNON SUPPLIED BY VENDOR AND INSTALLED BY CONTRACTOR.
  - A3-06 SURFACE MOUNT STRIP LIGHT FIXTURE TO DECK.
  - A3-07 SUSPEND TRACK 18'-0" ABOVE FINISH FLOOR.
  - A3-08 INSTALL CEILING SPEAKER PER [ 10 / A31.00 ]
  - A3-09 EXTEND CEILING PER PLAN INTO PARTITION POCKET
  - A3-10 LANE NUMBER PROJECTOR SUPPLIED BY OWNER AND INSTALLED BY CONTRACTOR.
  - A3-11 SEE ELECTRICAL LIGHTING PLANS FOR LIGHTING LAYOUT. SCALE DRAWINGS TO NEAREST INCH FOR LAYOUT.
- 2 KEYNOTES**  
12" = 1'-0"

- 01 SEE ELECTRICAL DRAWINGS FOR LIGHT FIXTURE SCHEDULE.
- 02 LIGHTS ARE SUPPLIED AND INSTALLED BY CONTRACTOR.
- 03 CENTER CAN LIGHT FIXTURES WITHIN CEILING TILES UNLESS NOTED OTHERWISE.
- 04 CENTER CAN LIGHT FIXTURES IN BOTH OVERALL DIMENSIONS OF SOFFITS UNLESS NOTED OTHERWISE.
- 05 TRIM RINGS OF ALL MECHANICAL, ELECTRICAL, AND PLUMBING ITEMS LOCATED IN CEILINGS ARE TO MATCH ADJACENT CEILING OR SOFFIT COLOR.
- 06 COORDINATE COLORS OF GRILLES, REGISTERS AND DIFFUSERS WITH ADJACENT CEILING COLOR. ITEMS LOCATED IN BLACK CEILINGS SHALL BE BLACK. ITEMS LOCATED IN WHITE CEILINGS SHALL BE WHITE. IF CEILINGS ARE NOT BLACK OR WHITE, THEN PAINT ITEMS TO MATCH ADJACENT COLOR.
- 07 PAINT ALL GYPSUM SOFFITS.
- 08 I.T. EQUIPMENT SUPPLIED AND INSTALLED BY VENDOR. PROVIDE POWER AND DATA PER ELECTRICAL DRAWINGS. CONFIRM MOUNTING HEIGHTS OF CAMERAS WITH I.T. MANAGER. CENTER ALL DEVICES IN CEILING TILES.

- CA CAMERA
  - CT CT WIRELESS AP
  - IC IC WIRELESS AP
  - PR IC WIRELESS AP
- 1 GENERAL NOTES**  
12" = 1'-0"

**3 LEVEL 1 CEILING PLAN AREA 'C'**  
18" = 1'-0"

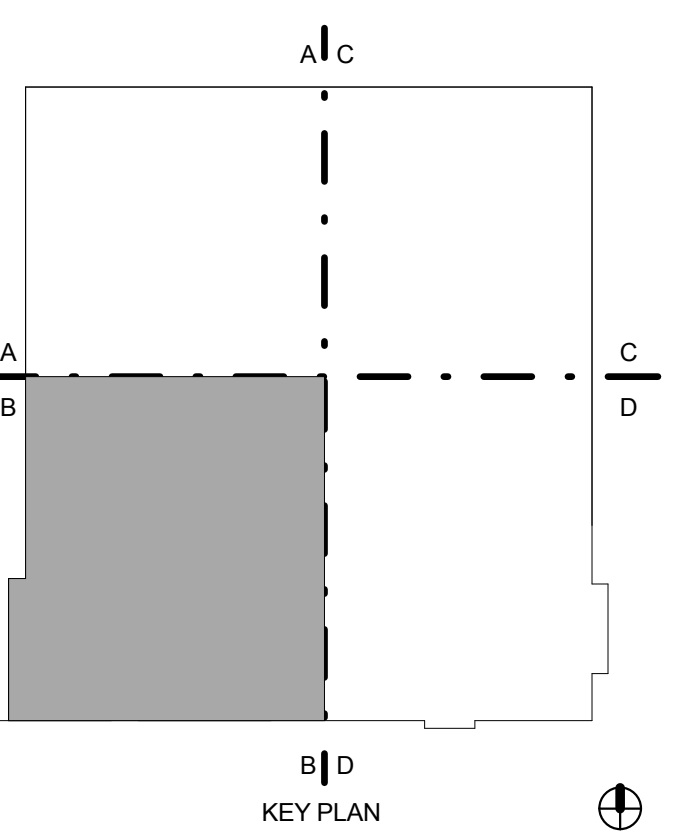

**KEY PLAN**

REV.	DATE	ISSUE TITLE
05.12.17		ISSUE FOR PERMIT
05.24.17		ISSUE FOR BID



CINERGY AMARILLO

**LEVEL 1 CEILING PLAN AREA 'B'**

ARA007 PROJECT NUMBER **A30.01b** SHEET NUMBER