


- PLAN NOTES:
- IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL DIMENSIONS AND ELEVATIONS PRIOR TO BEGINNING CONSTRUCTION.
  - REFER TO SHEET S0.1 AND S0.2 FOR GENERAL NOTES.
  - REFER TO SHEET S1.1 THRU S1.5 FOR DETAILS NOT NOTED ON PLAN.
  - FINISH FLOOR-DATUM ELEVATION 100'-0".
  - PIERS ARE NOTED ON PLAN THUS:  
18/36 ← PIER SHAFT DIAMETER/BELL DIAMETER  
96'-10" ← TOP OF PIER ELEVATION
  - PIERS AND COLUMNS ARE CENTERED ON GRIDLINE INTERSECTIONS UNLESS DIMENSIONED OTHERWISE ON PLAN.
  - COLUMNS ARE NOTED ON PLAN THUS:  
C1 ← COLUMN MARK  
REFER TO COLUMN SCHEDULE.
  - BASE PLATES ARE NOTED ON PLAN THUS:  
BP-1 ← BASE PLATE MARK. REFER TO BASE PLATE SCHEDULE FOR INFORMATION
  - FLOOR SLAB SHALL BE AS NOTED ON PLAN.
  - PROVIDE 2-#4x3'-0" DOWELS CENTERED IN SLAB AT ALL INTERIOR CORNERS WITHOUT A CONSTRUCTION OR SAWN JOINT.
  - REFER TO ARCHITECTURAL FOR LOCATION AND EXTENT OF ALL LEDGES, POCKETS OR DEPRESSIONS.
  - X.B. INDICATES X-BRACE, REFER TO SHEET S5.1 FOR BRACE ELEVATIONS.
  - C.B. INDICATES CHEVRON BRACE, REFER TO SHEET S5.1 FOR BRACE ELEVATIONS.
  - POLISHED CONCRETE SLABS SHALL BE MOIST CURED FOR 7 DAYS.
  - CONSTRUCTION JOINTS (C.J.) AND SAWN JOINTS (S.J.) MAY BE INTERCHANGED AT CONTRACTOR'S DISCRETION. REFER TO 687/S1.1.
  - REFER TO 5/S1.3 FOR COLUMN BEARING ELEVATION, UNLESS NOTED OTHERWISE ON DETAILS.

COLUMN SCHEDULE	
MARK	SIZE
C1	HSS5X5X1/4
C2	W10X49
C3	W8X31
C4	HSS5X5X3/8
C5	HSS4X4X1/4

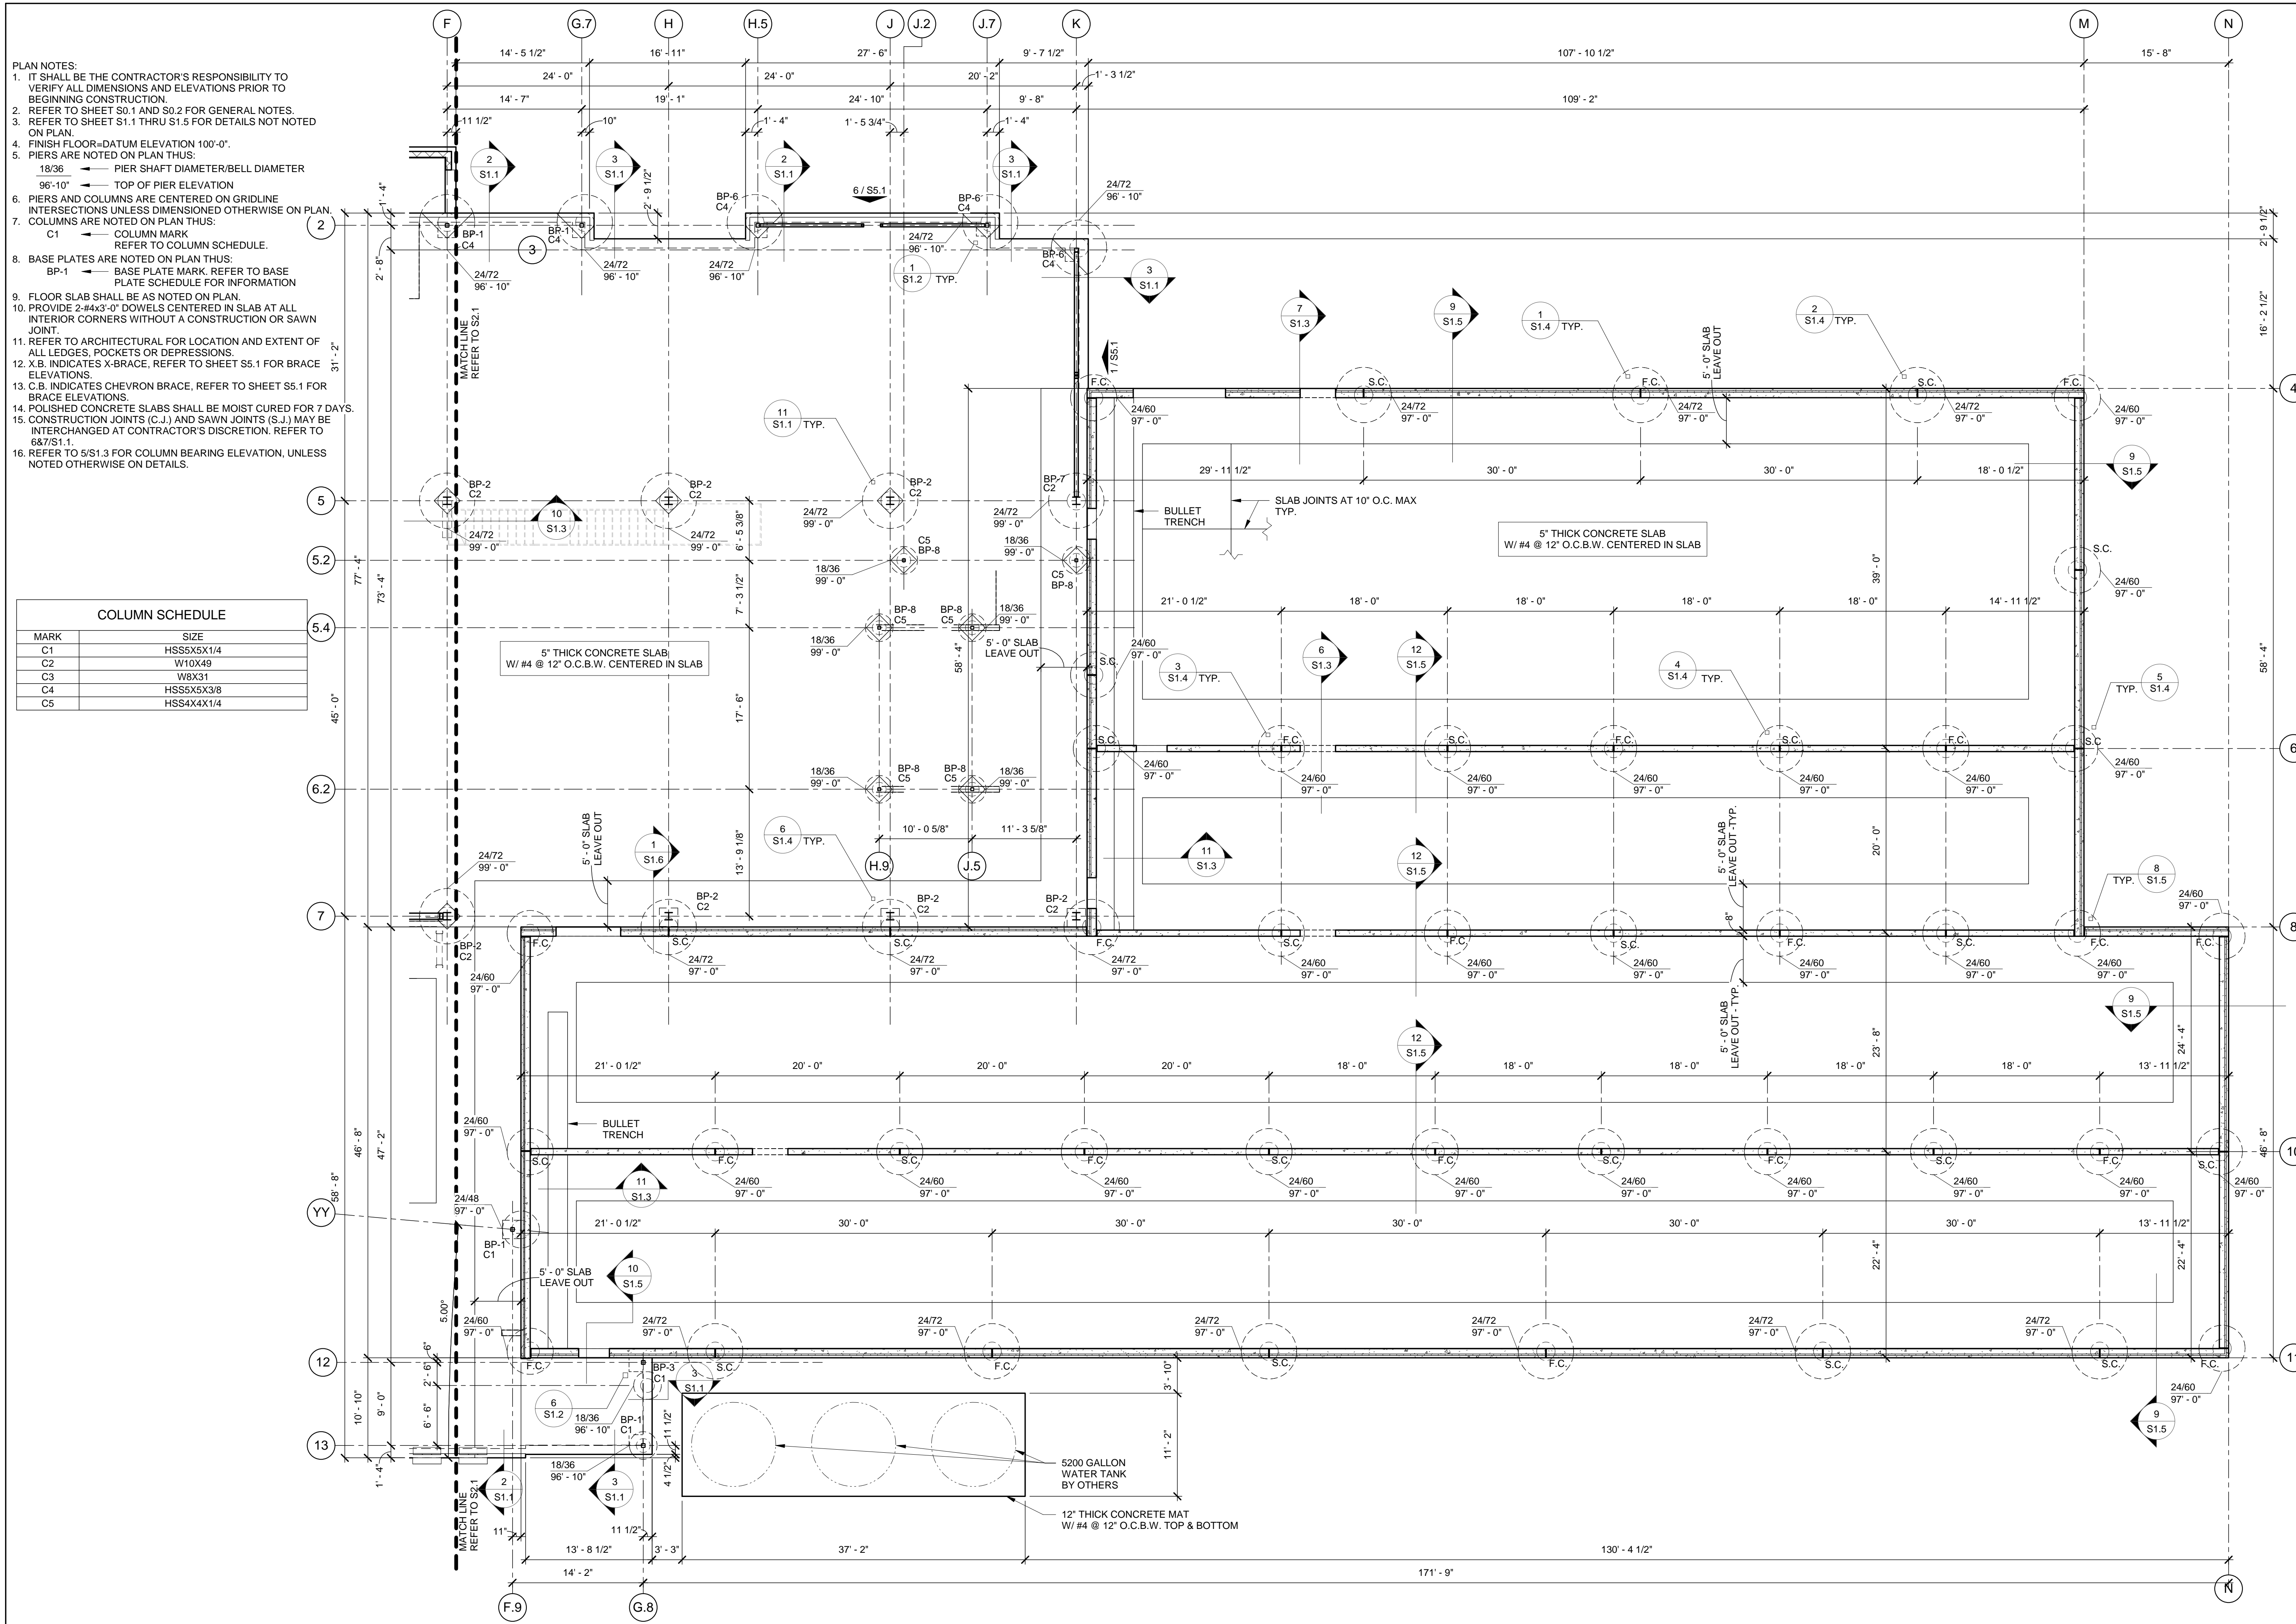

THIS DOCUMENT IS RELEASED ON 12-1-17 FOR THE PURPOSE OF BIDDING ONLY UNDER THE AUTHORITY OF BRYAN WADE GREEN, P.E. 74453. IT IS NOT TO BE USED FOR CONSTRUCTION OR FABRICATION PURPOSES.

Revision Schedule		
Rev. #	Revision Description	Revision Date

**FWN&A**  
 Frank W. Neal & Assoc., Inc.  
 1016 W. Broadway Ave. 817-332-1944  
 Fort Worth, TX 76104 fwna-eng.com  
 Texas firm reg. no. F-600296

**TEXAS GUN EXPERIENCE**  
 GRAPEVINE, TX

217.130.03  
 DECEMBER 1, 2017

**FOUNDATION PLAN - AREA B**